


## PERU CENTER &amp; TOWNLINE12 ROAD IMPROVEMENTS

	ITEM	EXTEN.	ITEM DESCRIPTION	QTY.	UNITS	UNIT PRICE	TOTAL COST
<b>ROADWAY</b>							
1	201	11001	CLEARING AND GRUBBING, AS PER PLAN	1	LS	\$2,000.00	\$2,000.00
2	203	10000	EXCAVATION	1,885	CY	\$25.00	\$47,125.00
3	203	20000	EMBANKMENT	32	CY	\$50.00	\$1,600.00
4	204	10000	SUBGRADE COMPACTION	1,255	SY	\$2.00	\$2,510.00
5	204	13000	EXCAVATION OF SUBGRADE	82	CY	\$40.00	\$3,280.00
6	204	30011	GRANULAR MATERIAL, TYPE B, AS PER PLAN	82	CY	\$80.00	\$6,560.00
7	204	45000	PROOF ROLLING	1	HR	\$100.00	\$100.00
8	606	15050	GUARDRAIL, TYPE MGS	175	FT	\$30.00	\$5,250.00
9	606	17360	GUARDRAIL, TYPE MGS, LONG-SPAN	100	FT	\$50.00	\$5,000.00
10	606	26150	ANCHOR ASSEMBLY, MGS TYPE E	4	EA	\$3,000.00	\$12,000.00
11	623	38501	MONUMENT ASSEMBLY, AS PER PLAN	1	EA	\$1,000.00	\$1,000.00
12	SPEC.	50100	MAILBOX SUPPORT SYSTEM, SINGLE	1	EA	\$500.00	\$500.00
<b>ROADWAY SUBTOTAL =</b>							<b>\$86,925.00</b>
<b>EROSION CONTROL</b>							
13	659	10000	SEEDING AND MULCHING	2,586	SY	\$2.50	\$6,465.00
14	659	14000	REPAIR SEEDING AND MULCHING	129	SY	\$2.00	\$258.00
15	659	20000	COMMERCIAL FERTILIZER	0.36	TON	\$2,000.00	\$720.00
16	659	35000	WATER	14	MGAL	\$4.00	\$56.00
17	832	30000	EROSION CONTROL	2,000	EA	\$1.00	\$2,000.00
<b>EROSION CONTROL SUBTOTAL =</b>							<b>\$9,499.00</b>

	ITEM	EXTEN.	ITEM DESCRIPTION	QTY.	UNITS	UNIT PRICE	TOTAL COST
<b>DRAINAGE</b>							
18	605	31100	AGGREGATE DRAINS	123	FT	\$20.00	\$2,460.00
19	611	00400	4" CONDUIT, TYPE E	50	FT	\$10.00	\$500.00
20	611	00406	4" CONDUIT, TYPE F	50	FT	\$12.00	\$600.00
21	611	00900	6" CONDUIT, TYPE B	50	FT	\$32.00	\$1,600.00
<b>DRAINAGE SUBTOTAL =</b>							<b>\$5,160.00</b>
<b>PAVEMENT</b>							
22	253	01001	PAVEMENT REPAIR (6"), AS PER PLAN	1,500	SY	\$70.00	\$105,000.00
23	254	01000	PAVEMENT PLANING, ASPHALT CONCRETE (1.5-2")	15,542	SY	\$2.75	\$42,740.50
24	254	01601	PATCHING PLANED SURFACE, AS PER PLAN	500	SY	\$5.00	\$2,500.00
25	302	46000	ASPHALT CONCRETE BASE, PG64-22	165	CY	\$180.00	\$29,700.00
26	304	20001	AGGREGATE BASE, AS PER PLAN	204	CY	\$65.00	\$13,260.00
27	407	20000	TACK COAT, NON-TRACKING	1,651	GAL	\$4.00	\$6,604.00
28	441	50101	ASPHALT CONCRETE SURFACE COURSE, TYPE 1, (448), AS PER PLAN	599	CY	\$190.00	\$113,810.00
29	441	20301	ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 2, (448), AS PER PLAN	911	CY	\$175.00	\$159,425.00
30	617	10100	COMPACTED AGGREGATE	200	CY	\$75.00	\$15,000.00
31	618	39000	RUMBLE STRIPS (3 EACH)	2,330	FT	\$2.00	\$4,660.00
<b>PAVEMENT SUBTOTAL=</b>							<b>\$492,699.50</b>



ITEM	EXTEN.	ITEM DESCRIPTION	QTY.	UNITS	UNIT PRICE	TOTAL COST	
<b>TRAFFIC CONTROL</b>							
32	620	00500	DELINEATOR, POST GROUND MOUNTED	4	EA	\$100.00	\$400.00
33	626	00110	BARRIER REFLECTOR, TYPE 2	8	EA	\$20.00	\$160.00
34	630	02100	GROUND MOUNTED SUPPORT & STUB, NO. 2 POST	191	FT	\$20.00	\$3,820.00
35	630	08510	STREET NAME SIGN SUPPORT & STUB, NO. 2 POST	22	FT	\$30.00	\$660.00
36	630	08600	SIGN POST REFLECTOR	13	EA	\$50.00	\$650.00
37	630	80100	SIGN, FLAT SHEET	136.2	SF	\$40.00	\$5,448.00
38	630	80500	SIGN, DOUBLE FACED, STREET NAME	3	EA	\$300.00	\$900.00
39	630	84900	REMOVAL OF GROUND MOUNTED SIGN AND DISPOSAL	16	EA	\$15.00	\$240.00
40	630	86002	REMOVAL OF GROUND M. POST SUPP. & DISPOSAL	18	EA	\$15.00	\$270.00
41	642	00090	EDGE LINE, 4"	2.74	MILE	\$1,000.00	\$2,740.00
42	642	00290	CENTER LINE	1.35	MILE	\$2,000.00	\$2,700.00
43	642	00290	TEMPORARY CENTERLINE STRIPING (2 APPLICATIONS)	2.7	MILE	\$500.00	\$1,350.00
44	644	00000	STOP LINE	48	FT	\$25.00	\$1,200.00
<b>TRAFFIC CONTROL SUBTOTAL =</b>						<b>\$20,538.00</b>	
ITEM	EXTEN.	ITEM DESCRIPTION	QTY.	UNITS	UNIT PRICE	TOTAL COST	
<b>MAINTENANCE OF TRAFFIC</b>							
45	614	12420	DETOUR SIGNING	1	LS	\$10,000.00	\$10,000.00
<b>MAINTENANCE OF TRAFFIC SUBTOTAL =</b>						<b>\$10,000.00</b>	
<b>INCIDENTALS</b>							
46	103	05000	PREMIUM FOR CONTRACT PERFORMANCE BOND AND FOR PAYMENT BOND	1	LS	\$6,000.00	\$6,000.00
47	614	11000	MAINTAINING TRAFFIC	1	LS	\$8,000.00	\$8,000.00
48	623	10000	CONSTRUCTION LAYOUT STAKES AND SURVEYING	1	LS	\$5,000.00	\$5,000.00
49	624	10000	MOBILIZATION	1	LS	\$16,178.50	\$16,178.50
<b>INCIDENTALS SUBTOTAL =</b>						<b>\$35,178.50</b>	
<b>PROJECT TOTAL =</b>						<b>\$660,000.00</b>	

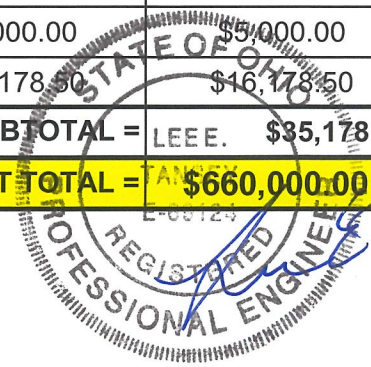

*[Handwritten signature]*