

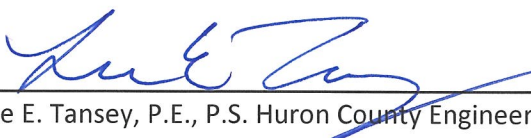
Chip and Seal - Phase 1 Estimate

Various County Roads:

Average 0.43 CRS2-P and 22lbs of #8 washed limestone

Total Project = 350,000 SY

Ref.	Item	Description	Quant.	Unit	Price	Costs
1	103.5	Premium Contract Bond	1	LS	\$5,000.00	\$5,000.00
2	441	Seal Coat Bituminous Material, CRS2-P @ 0.43 avg. gal/SY, As Per Plan	150,000	GAL	\$3.00	\$450,000.00
3	422	Seal Coat Aggregate #8 Washed Limestone @ 22lbs/SY, As Per Plan	3,900	TN	\$35.00	\$136,500.00
4	614	Maintaining Traffic	1	LS	\$12,000.00	\$12,000.00
5	624	Mobilization	1	LS	\$8,000.00	\$8,000.00
6	Spec.	Contingencies	1	LS	\$8,500.00	\$8,500.00
					TOTAL	\$620,000.00


 Lee E. Tansey, P.E., P.S. Huron County Engineer

