

Greenwich Milan Townline Road Improvements - Phase 2

1,000 ft south of Tiger Road to Court Road
 14,500 ft (2.7 mi) in length with an average width of 24 ft. Asphalt Level Course, Asphalt Surface 1 3/4" (Avg.)
 Paint markings & Signs from US 250 to SR 18 (centerline and edge line)

GMTL and Zenobia Intersection:


GMTL: Mill 2" and place 1 3/4" Intermediate Type 2 & 1 1/4" Surface Type 1 (350 ft north and south)
 Zenobia: Mill 2" for 60 ft each way, Place Type 2 and Type 1. Type 1 450 ft each way on Zenobia

Zenobia Road

Zenobia: 1 1/4" Surface Type 1 (450 ft west and east)

Ref.	Item	Description	Quant.	Unit	Unit Cost	Total Cost
1	103.5	Premium Contract Bond	1	LS	\$5,000.00	\$5,000.00
2	202	Removal & Disposal Signs & Posts	1	LS	\$1,000.00	\$1,000.00
3	253	Full Depth Pavement Repair, 6", as per plan	900	SY	\$60.00	\$54,000.00
4	254	Pavement Planning, 2"	2,300	SY	\$4.00	\$9,200.00
5	254	Pavement Planning, Butt Joints (0" - 1 3/4"), as per plan	6	EA	\$500.00	\$3,000.00
6	407	Tack Coat @ 0.1 Gal/SY, non-tracking	5,000	GAL	\$2.50	\$12,500.00
7	441	Asphalt Conc. , Intermediate, Type 2, (1 3/4"), PG64-22, as per plan	130	CY	\$210.00	\$27,300.00
8	441	Asphalt Conc. , Level/Scratch, Type 1, Variable, PG64-22, as per plan	300	CY	\$220.00	\$66,000.00
9	441	Asphalt Conc., Surface Course, Type 1, 1 1/2", PG64-22, as per plan	2,100	CY	\$195.00	\$409,500.00
10	614	Work Zone Marking Signs	20.0	EA	\$100.00	\$2,000.00
11	614	Maintaining Traffic	1	LS	\$15,000.00	\$15,000.00
12	617	Stabilized Crushed Agg. (berm), as per plan	600	TN	\$60.00	\$36,000.00
13	623	Monument Boxes, Adjust to Grade	6	EA	\$800.00	\$4,800.00
14	630	Signs (OPWC) 48" x 36", as per plan	2	EA.	\$500.00	\$1,000.00
15	630	Ground Mounted Support, Square Post, (2-1/4") Stubs, 730.016, as per plan	29	EA	\$60.00	\$1,740.00
16	630	Ground Mounted Support, Square Post, (2") 730.016, as per plan	319	FT	\$15.00	\$4,785.00
17	630	Sign Posts Reflectors	29	EA	\$50.00	\$1,450.00
18	630	Sign, Flat Sheet, as per plan	104	SF	\$30.00	\$3,120.00
19	630	Signs, Flat Sheet (Street Name), as per plan	10	EA.	\$200.00	\$2,000.00
20	624	Mobilization	1	LS	\$10,000.00	\$10,000.00
21	642	Center Line	5.5	Mile	\$1,200.00	\$6,600.00
22	642	Edge Line	11	Mile	\$800.00	\$8,800.00
23	644	Stop Bars, 24"	1	FT.	\$50.00	\$4,000.00
24	Spec.	Contingencies	1	LS	\$6,205.00	\$6,205.00

Total = \$695,000.00

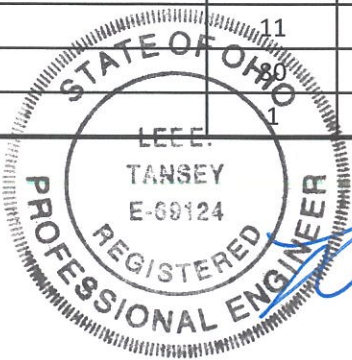

[Handwritten signature in blue ink]